

# ENDURO 650B

## SIXFIFTY 7500



### FEATURES

- 11 Speed
- Rock Shox Pike RCT3 fork
- Sram GX1 drivetrain
- KS Lev DX Integra Seatpost


#### NEW OR CHANGED FOR 2017

- WTB STP-I25 TCS, Disc, Tubeless Ready Rims
- Sram GX 1 Rear Derailleur
- Sram GX 1, Trigger, Right Only Shifters
- Kore Durox Handlebar
- Kore Repute Stem
- Sram Level TL Hydraulic Disc brakes

### BIKE SPECS

Frame	FSS 650B 160mm, Alloy 6061 w/Custom Formed Dbl.Buttet TT & DT, 1.5 Taper, 12 x 142 rear axle, w/replaceable derailleur hanger
Rear Shock	Rock Shox Monarch RT3, KHS Tuned, Solo air w/High Volume Eyelet, 3 Pos. Switch= Open/Pedal/Lock, Rebound adj.
Fork	Rock Shox Pike RCT3, 160mm, Solo Air, 1.5 Taper, 15mm Thru-Axle, External Rebound, Low Speed Compression w/3 Position Open/Platform/Lock, 110mm Boost
Headset	FSA Orbit 1.5E, Zero Stack, 1 1/8"~1.5
Rims	WTB STP-I25 TCS, Disc, Double Wall, 28H, Tubeless Ready
Hub, Front	Light Weight S/B Alloy Disc, 15mm, Straight Pull, 110mm Boost
Hub, Rear	Light Weight S/B Alloy Disc, XD Driver, 12 x 142mm, Straight Pull
Tires	Maxxis High Roller II, 27.5 X 2.4F/2.3R, 60 TPI Folding, 3C/EXO/TR, Tubeless Ready
Spokes	14G/15G Double Butted Black Stnls w/Alloy Nipples, 28x28
Derailleur, Rear	Sram GX 1, 11s X-Horizon, Type 2
Shifters	Sram GX 1, 11s Trigger, Right Only
Chain	SRAM PC-1130
Crankset	SRAM GX 1201, X-Sync, 2 pc., GXP, 30T Direct Mount S: 170, M-XL: 175
BB	Sram GXP-XR, Outboard Bearing
Freewheel / Cassette	Sram XG-1150, 10-42T, 11-speed
Seatpost	Kind Shock LEV DX Integra w/Remote, Travel Adjust, Internal Routing, 31.6x392mm
Saddle	WTB High Tail, CrMo Rail
Handlebar	Kore Durox 35mm, 780mm X 20mm, 31.8
Stem	Kore Repute, S: 35mm, M-L: 50mm
Grips	Q2 Lock-on
Brake Levers	Sram Level TL, Match Maker X
Brakes	Sram Level TL Hydraulic Disc, 2 Piston, 180/160mm Rotors
Color	Matte Red
Frame Size	S/15, M/16.5, L/18, XL/20

PART #	MODEL	SIZE	COLOR
97-155-000	SixFifty 7500	S/15	Matte Red
97-155-001	SixFifty 7500	M/16.5	Matte Red
97-155-002	SixFifty 7500	L/18	Matte Red
97-155-003	SixFifty 7500	XL/20	Matte Red

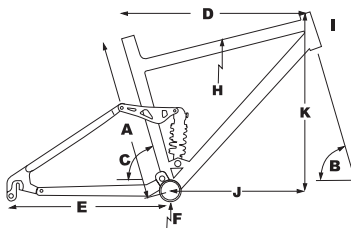

### GEOMETRY

SIZE	A s/tc-t	B h/t°	C s/t°	D effectv	E c/s	F Blight	H s.o.	I lh/t	K Stack	J Reach
S/15	390.5.4	66.5°	75°	52.85	43.517.1	34.513.6	76.780.2	110.1.3	59.623.5	42.516.7
M/16.5	420.6.5	66.5°	75°	60.85	43.517.1	34.513.6	76.930.3	110.1.3	59.623.5	44.517.5
L/18	460.8.1	66.5°	75°	62.56	43.517.1	34.513.6	79.21.2	120.1.7	60.623.9	46.218.2
XL20	500.9.7	66.5°	75°	62.54	43.517.1	34.513.6	82.02.3	130.1.1	61.624.2	48.018.9

